

IFP6530




- UFT (Ultra Fine Touch) Technology
- myViewBoard™ digital whiteboard software
- Dual-pen writing with 3mm/8mm diameter pen tips
- Ambient Light Sensor
- ENERGY STAR® certified

The ViewBoard® IFP30 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. 2mm height sensitivity increases writing accuracy while allowing for dual-pen annotation with both 3mm & 8mm diameter pens. It's also incredibly responsive, distinguishing the different touch diameters among pens, fingers and palms to avoid false strokes. In addition, the IFP30 series is integrated with myViewBoard™ digital whiteboard software to provide collaboration on the go, and is further complimented by native casting including Miracast, Airplay, and Chromecast. Interactive whiteboards are becoming commonplace. The IFP30 series is the solution for schools and workplaces of all sizes and considerations.

UFT Technology

Ultra Fine Touch Technology produces a lag-free, pen-on-paper writing experience. Writing accuracy is greatly improved and student-teacher interaction flows more naturally thanks to real-time response rates, dual-pen recognition and our new 3mm tipped pens.

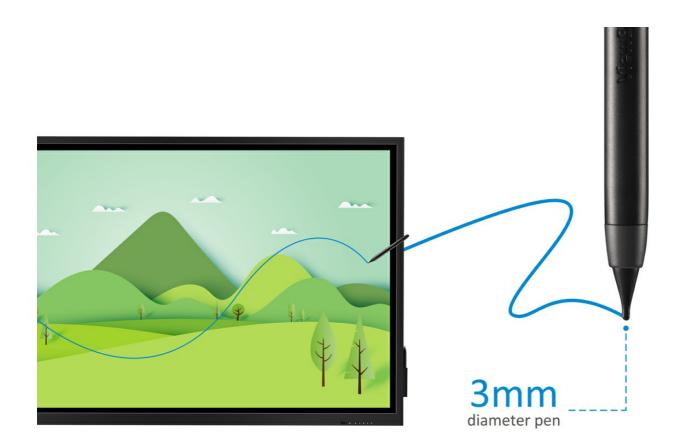

Dual-Pen

Automatically detect pen diameter (8mm & 3mm) and write simultaneously with different colours and thicknesses.




Full Native Performance on Android

Built-in myViewBoard $\ ^{\text{\tiny TM}}$ digital whiteboard software to collaborate on the go.




Wireless Content Sharing

Content sharing with built-in ViewBoard® Cast software.

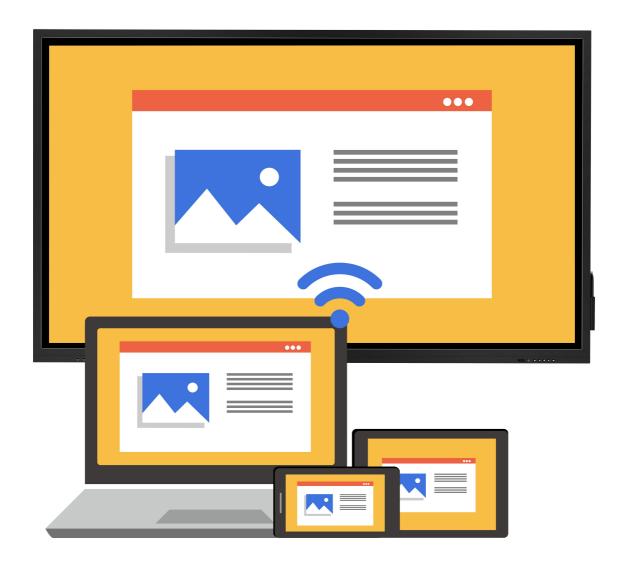

Environmental Sustainability

ENERGY STAR certified for increased energy efficiency.

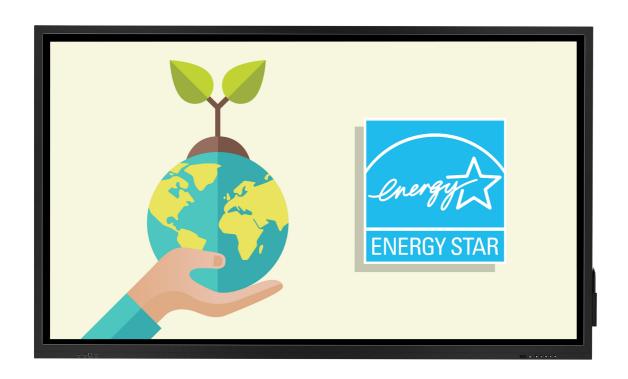


Ambient Light Sensor




Slot-in PC

Intel OPS PC allows for efficient deployment and easy maintenance (Optional).

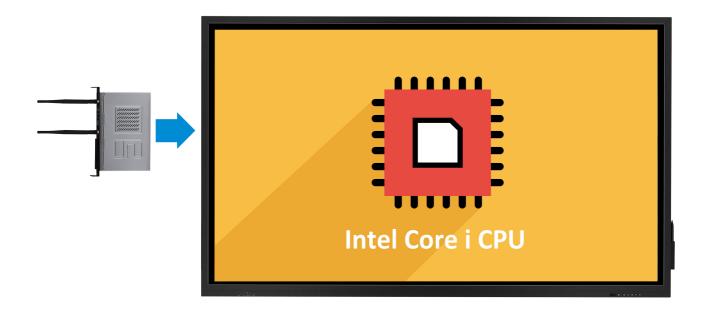

I/O Ports

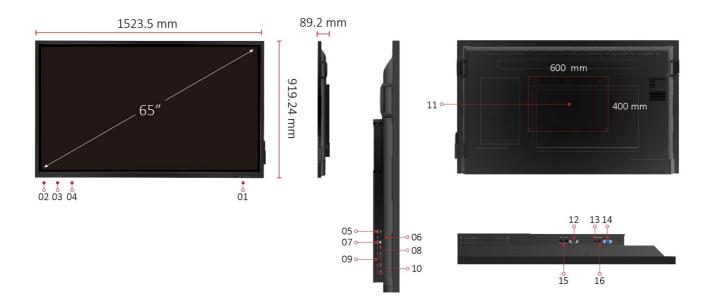

- 1. CONTROLS PANEL
- 2. USB X 2
- 3. TOUCH USB
- 4. HDMI IN
- 5. HDMI OUT
- 6. SPDIF OUT
- 7. TOUCH USB
- 8. USB X 2
- 9. DISPLAY PORT IN
- 10. HDMI IN X 2
- 11. VESA® WALL Mount 600x400 mm
- 12. RS232 IN
- 13. AUDIO OUT
- 14. VGA IN
- 15. LAN X 2
- 16. PC AUDIO IN

Technical Specifications

Display	Panel Size	65"
	Type/Tech	IPS/V-by-one
	Display Area (mm)	1428.48*803.52mm
	Aspect Ratio	16:9
	Native Resolution	4K60hz
	Colours	10 bits
	Brightness	360(Typ.)
		320(min.)
	Contrast Ratio	1200:1
	Response Time	6ms(Type)
	Viewing Angles	H = 178, V = 178 typ.
	Backlight Life	30,000hr(min)
	Surface Treatment	Hardness: 7H
		Costing: AG coating
		Thickness: 4mm
	Bezel	29/29/29/49.7mm(btm.)
	Orientation	Landscape
Platform	Processor	ARM Cortex-A73*2 + Cortex-A53*2 1.5Hz
	RAM	3GB DDR4
	Storage	16GB
Touch	Type/ Tech	IR Recognition
	Touch Resolution	32767W*32767D
	Touch Point	20 points
INPUT	LIDMI	10 writing
	HDMI	Front*1 Rear* 2
		All ports HDMI2.0
	RGB / VGA	1
	DisplayPort	DP1.2*1
	Audio	PC audio in (3.5 mm)*1
	RS232	x1
	OPS	1
ОИТРИТ	HDMI	*1
	Audio	3.5mm Earphone Out *1, SPDIF*1
	SPDIF	x1
LAN	RJ45	*2
		10M/100
USB	Туре А	USB2.0 *4 (Front:*2 Rear: *2)
	Type B	For touch (Front*1, rear*1))
SPEAKERS	SPEAKERS	15WX2
Camera plate on top for	Camera plate on top for screw-in	yes
screw-in webcam installation	webcam installation	
COMPATIBILITY	RGB PC/HDMI PC	VGA: 1080p
		HDMI: 4K
	HDMI	3840x2160

	DisplayPort	3840x2160
Embedded OS	Embedded OS	OS 8.0 Resolution: 1080p
Power	Voltage	PB model: 100-240VAC +/- 10% Wide Range
	Consumption	On:129W(Typ.) Off: <0.5W
ERGONOMICS	Wall Mount (VESA®)	400*600
OPERATING CONDITIONS	Temperature (° C)	0°C to 40°C
	Humidity	20% ~ 80% RH Non-Condensing(working)
DIMENSIONS (W x H x D)	Physical (inch / mm)	1523.5*919.24*89.2(mm) 59.98*36.19*3.51(inch)
	Packaging (inch / mm)	1660*1045*245(mm) 65.4*41.1*9.6(inch)
WEIGHT	Net (lb / kg)	97.4lb/44.2kg
	Gross (lb / kg)	126.8lb/57.5kg
REGULATIONS	REGULATIONS	EMC/CE-EU CB-EU/IEC62368 RoHS Green BOM & RoSH DoC REACH WEEE (Doc & Disassembly report) ErP EAC(local apply) UKrSEPRO(local apply) BIS-India
Energy Star version	Energy Star version	YES
EEI rating	EEI rating	A
PACKAGE CONTENTS	PACKAGE CONTENTS	 US/EU/UK/AU power cord 3M, no PE bag QSG Compliance statement HDMI cable 3M*1 Touch USB cable 3M *1 Touch PEN *2. Extra tip: Thick*2, thin*1 Remote control with AAA batteries (VS version) Webcam plate with screws pack Need to compatible with Logi CC4000e) Add screw holes on top of the frame Pen tray*1 (two pen, detachable, mount for both side)
Compatible Slet in BC	Compatible Slet in BC	10. Wall mount screws
Compatible Slot-in PC	Compatible Slot-in PC	VPC12 series